


RAW WATER PUMPED


WATER TREATED

TREATED WATER DELIVERED


LAKE WATER PUMPED TO PLANT



SEDIMENT AND DEBRIS REMOVED




OZONE DISINFECTION



CHLORINE DISINFECTION




FINAL PARTICLES FILTERED



~~AMMONIA ADDED~~




WATER DISTRIBUTED BY CITIES TO CUSTOMERS

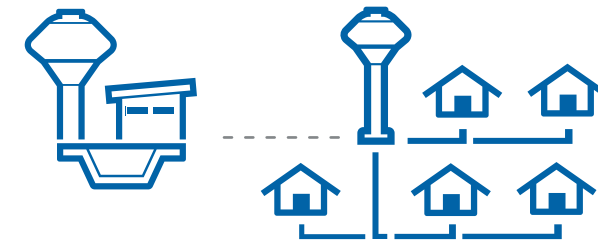

DURING NTMWD'S ANNUAL, 28-DAY CHANGE IN DISINFECTANT:

AMMONIA IS REMOVED FROM THE DISINFECTION PROCESS. WITHOUT AMMONIA, THE CHLORINE IN THE WATER MAY BE MORE NOTICEABLE, BUT THE AMOUNT IS CONSISTENT WITH LEVELS YEAR ROUND.



FLUSHING FROM FIRE HYDRANTS CAN BE AN IMPORTANT PART OF MAINTAINING THE WATER SYSTEM AND HIGH WATER QUALITY. CITIES MAY FLUSH TO MOVE WATER THROUGH PIPES MORE QUICKLY.



TESTING IS CONTINUALLY CONDUCTED THROUGHOUT TO ENSURE WATER QUALITY. RESULTS ARE POSTED ON CITY AND NTMWD WEBSITES.

