


# Temporary Change in Water Treatment Process

RAW WATER  
PUMPED


WATER  
TREATED

TREATED WATER  
DELIVERED


LAKE WATER  
PUMPED TO PLANT



SEDIMENT AND  
DEBRIS REMOVED




OZONE  
DISINFECTION



CHLORINE  
DISINFECTION




FINAL PARTICLES  
FILTERED



AMMONIA  
ADDED



WATER DISTRIBUTED BY  
CITIES TO CUSTOMERS

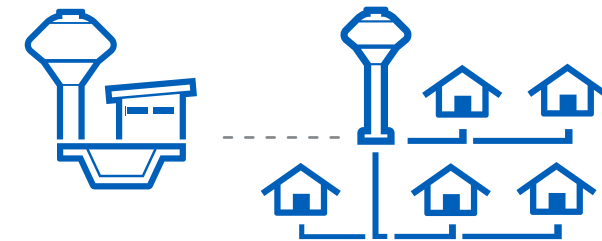

## DURING NTMWD'S ANNUAL, 28-DAY CHANGE IN DISINFECTANT:

AMMONIA IS REMOVED FROM THE DISINFECTION PROCESS. WITHOUT AMMONIA, THE CHLORINE IN THE WATER MAY BE MORE NOTICEABLE, BUT THE AMOUNT IS CONSISTENT WITH LEVELS YEAR ROUND.



FLUSHING FROM FIRE HYDRANTS CAN BE AN IMPORTANT PART OF MAINTAINING THE WATER SYSTEM AND HIGH WATER QUALITY. CITIES MAY FLUSH TO MOVE WATER THROUGH PIPES MORE QUICKLY.



TESTING IS CONTINUALLY CONDUCTED THROUGHOUT TO ENSURE WATER QUALITY. RESULTS ARE POSTED ON CITY AND NTMWD WEBSITES.

